

ColoQuick MAXX4

CONFIGURE A TEMPERATURE SENSOR

How to configure a temperature sensor after replacement:

Example: B1


1. Press




→ Display reads:





2. Select MENU CODE 9991 using the arrow keys:





Then press OK:



3. Press "Arrow down" once to select B1, then press OK.

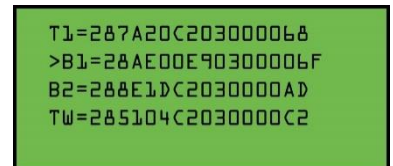


4. Select the sensor ID (code), without a star*, then press OK.

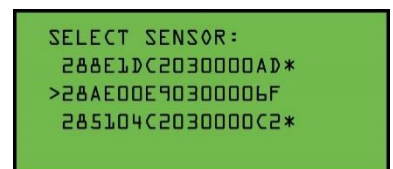

The sensor ID is unique for each sensor. A star* to the right indicates the sensor is already in use.

5. Press




to leave the menu.



A MAXX4 has 4 temperature sensors:

- Top sensor (T1)
- Bottom sensor 1 (B1)
- Bottom sensor 2 (B2)
- Tap Water sensor (TW)

The picture below shows the location of the 4 sensors in the tank:

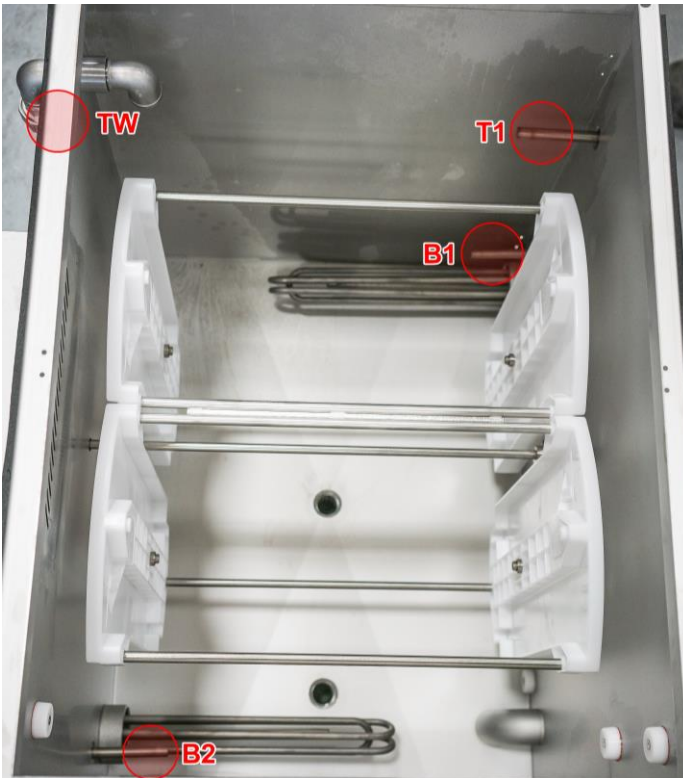

The picture below shows how the sensors are fitted in the Connection Box:

