







coloQuick Pasteur + MAXX4


DIAGNOSTIC MENU

The diagnostic menu makes it possible to test the installation, to make sure hot and cold tap water is present and the drain function works.

If the machine reports an error then the diagnostic menu can help finding the cause of the problem and thereby help to a faster solution of the problem.



- To enter diagnostic menu press the  key and enter **9990**. Finish with 
- To select which function to test press the  or  key.
- Press the  key to activate a function
- Press the  key to de-activate a function.

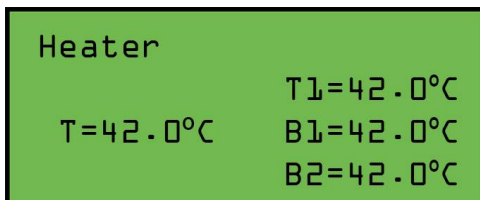
Notice: Not all functions are available on all models



Check heater function

T1 - Top sensor temperature
 B1 - Bottom heater 1 temperature
 B2 - Bottom heater 2 temperature

Press  /  keys to switch heater on / off

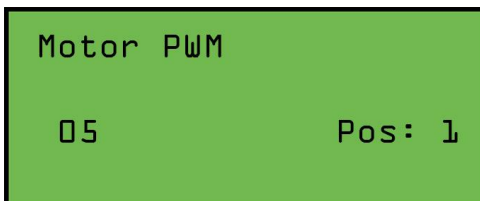


Check motor function

Select speed with  and  key

Press  /  keys to start/stop motor




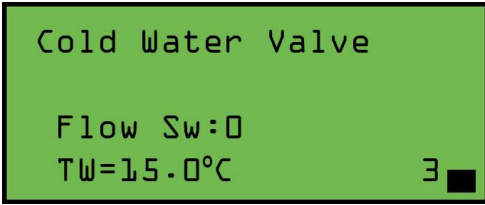

Check cold water in valve

Press / keys to open / close valve


Remark: The valve can't be opened at water level 4

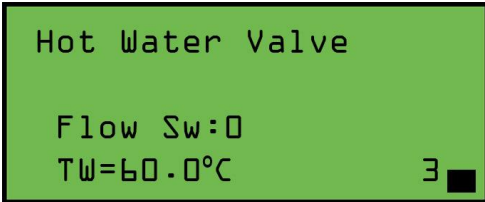

Check cold water in valve

Press / keys to open / close valve

Remark: The valve can't be opened at water level 4

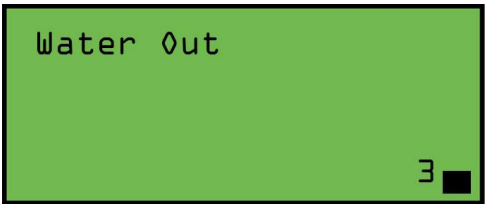


Drain water

Press / keys to open / close water valve

To leave the diagnostic menu, press the key.

Status menu

Pressing the button from the main menu will display the sensor status menu.

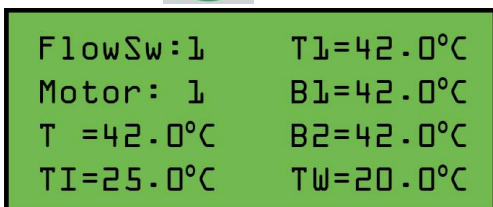

- FlowSw Tap water flow switch
- Motor Motor position switch
- TI Controller internal temperature
- T1 Top temperature sensor
- B1 Bottom temperature sensor #1
- B2 Bottom temperature sensor #2
- TW Tap water temperature (only correct, when water is running)

Notice: Not all sensors are available on all models

